

Thank you for purchasing this AUTEL tool. Manufactured to a high standard, our tool will, if used according to these instructions and properly maintained, give you years of trouble-free performance.

## Getting Started



**IMPORTANT:** Before operating or maintaining this unit, please read these instructions and the user manual carefully, pay extra attention to safety warnings and precautions. Use this unit correctly and properly. Failure to do so may cause damage and/or personal injury and will void the product warranty.



**NOTE:** The images and illustrations depicted in this quick guide may differ slightly from the actual ones. The user interfaces for iOS & Android devices might be slightly different. This quick guide uses screenshots from the iOS/Apple device app.

1



### Download & install app

- Scan the QR code to download the **MaxiAP200** app.
- Or search for **MaxiAP200** in App Store or Google Play to download and install the app to your device.

2



### Register & log in

- Open the MaxiAP200 app and tap **Register** near the top right of the screen.
  - Follow the on-screen instructions to complete the registration.
  - Log in with your registered email address and password.
- NOTE:** If you have a previously created Autel ID, please use it to log in.


3



### Bind VCI

Tap **Me > VCI Management**. Scan the QR code on the MaxiAP AP200 Bluetooth dongle to put in the serial number. Check if the email information is correct. Tap **Bind** to bind VCI.


4



### Purchase & install software

Tap **Mail** or the plus sign below the Diagnose list to purchase and install vehicle-specific software. Full OBDII functions included at no charge. You can get one free vehicle-specific software through **Mail** after successfully binding VCI for the first time. ( For iOS devices, the purchased vehicle-specific software will display in the Diagnose list, tap it to another application for diagnosing. )


5

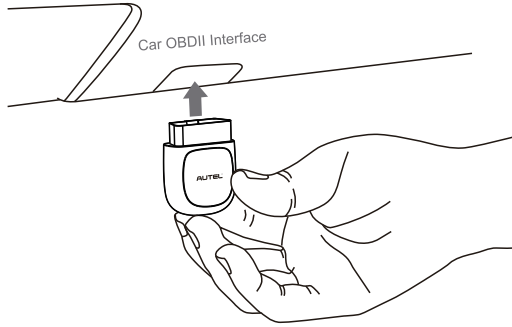

Plug the connector of the MaxiAP200 tool into the vehicle's Data Link Connector (DLC).

- The vehicle's DLC is generally located under the vehicle dash.


6

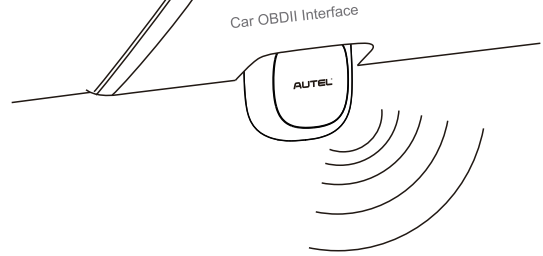

Turn the vehicle ignition to Key On, Engine Off position.

- The LED on the tool will light solid green when connected.

7

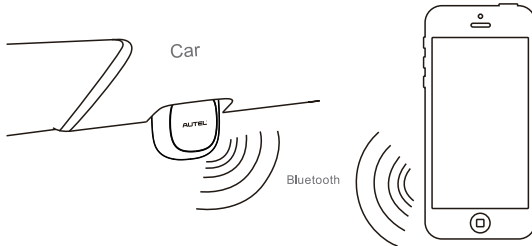


#### VCI Connection

For Android devices, tap **Me > VCI Connection** or the **VCI** button near the top right of the Home screen. For iOS devices, tap **Setting > Bluetooth** on your iOS device to open the Bluetooth function. Then tap the Bluetooth name of the MaxiAP AP200 tool to pair it with the device. The Bluetooth name starts with AP, followed by the serial number of the tool.

- When the device is successfully paired with the tool, the LED on the tool will light solid blue.
- Ensure your Android device's Bluetooth is turned on.

8



- Your MaxiAP200 is now ready for use.

## UPDATE

1. The installed vehicle-specific software can be seen on the Home screen. When a new version is available, an Update button will display. Tap the button to **update** the software.
2. Tap **Me > VCI Management > Detect firmware** to update the firmware if a new version is available.

## PRINT

1. For iOS devices, the saved report can be printed via the Print function on the device.
2. For Android devices, download and install a third-party Print app to print the saved report.

**NOTE:** The device needs to be connected with a printer to print.

For service and support, please contact us.

<http://pro.autel.com> / [www.autel.com](http://www.autel.com) / [support@autel.com](mailto:support@autel.com)  
 0086-755-86147779 (China HQ) / 1-855-288-3587/1-855-AUTELUS (North America)  
 0049 (0) 61032000522 (Europe) / (+507) 308-7566 (South America) / 03 9480 2978 / +61 476293327 (Australia)

© Autel Intelligent Technology Corp., Ltd. All Rights Reserved.